

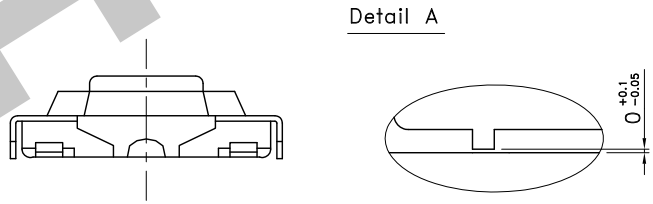


6	Stem	Brass C2680	
5	Dust Cover	PI Film	
4	Contact	SUS301	Ag Plated
3	Cover	Stainless Steel	
2	Case	PA9T	
1	Terminal	Brass C2680	Ag Plating
No.	Parts	Materials	Finish


Part No.	Force	Life	Case Color
STS-060-A	160±30gf	1,000,000 cycles	Ivory
STS-060-B	260±50gf	100,000 cycles	Black

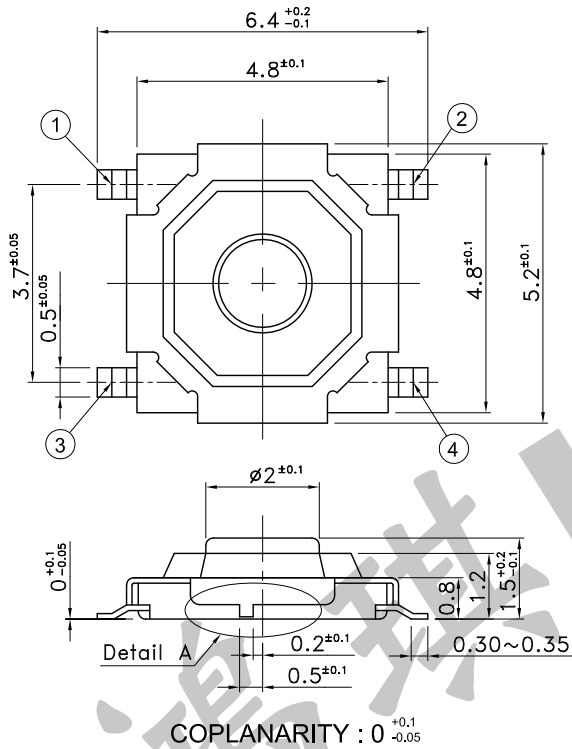


P.C.B TERMINAL POSITION

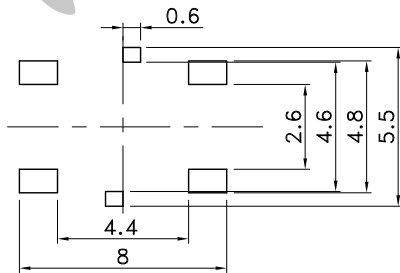

CIRCUIT ARRANGEMENT



REFLOW SOLDERING CONDITIONS

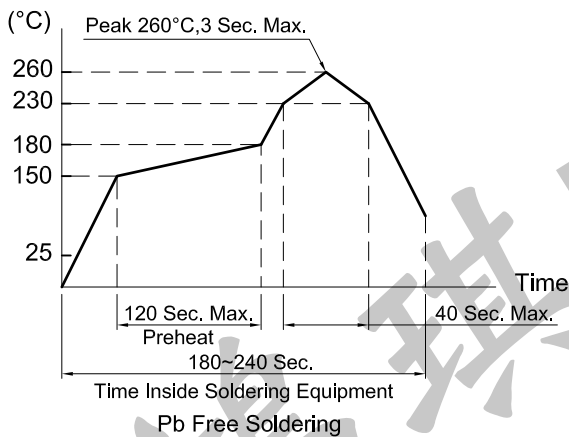

SPECIFICATIONS

- Rating : DC 12V 50mA Max.
- Contact Resistance : 100mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 Minute
- Stroke : 0.25±0.1 mm
- Taping : 4,000 Pcs/Reel
- Operating Temperature Range : -20°C~+70°C
- Storage Temperature Range : -30°C~+80°C

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-309-9
ISSUED	CONFIRMED	PART NO.	
John	Elvis	STS-060	
2020.04.23	2020.04.23	HORNG CHIH 鴻琪股份有限公司	