

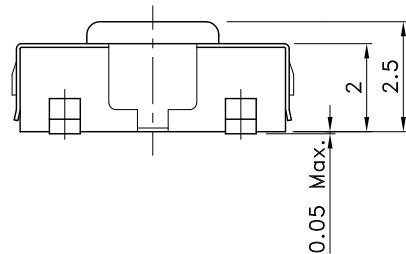
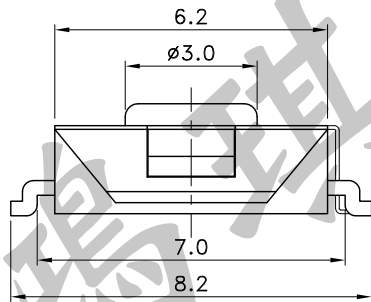
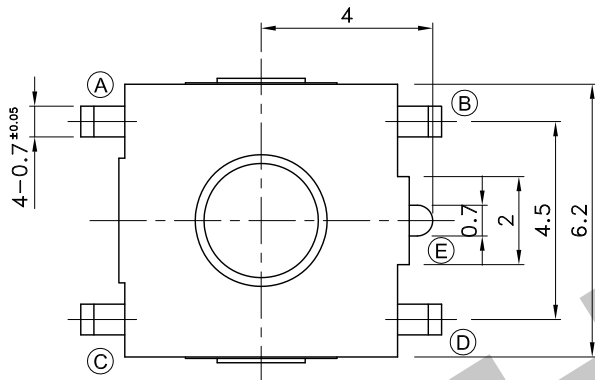


5	Contact	Stainless Steel	Ag Clad	
4	Terminal	Brass	Ag Plating	
3	Stem	PPA		UL 94HB, Gray
2	Cover	Phosphor Bronze	Sn Plating	
1	Case	PPA		UL 94HB, Gray
No.	Parts	Materials	Finish	Remarks




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

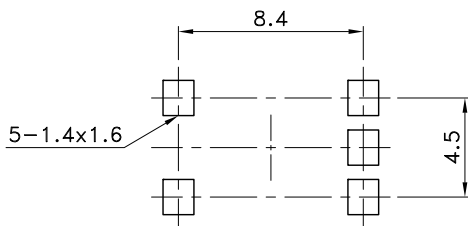

REFLOW SOLDERING CONDITIONS

SPECIFICATIONS

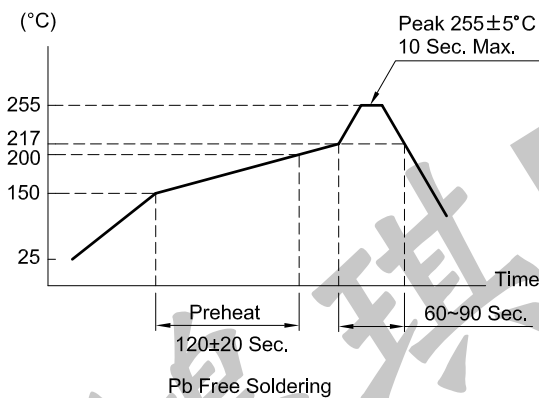

1. Rating : DC 12V 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V.
4. Dielectric Strength : AC 250V for 1 Minute
5. Operating Force : 160±50 gf
6. Circuit : 1 Pole 1 Position
7. Stroke : 0.25^{+0.2}_{-0.1} mm
8. Life : 1,000,000 Cycles
9. Taping : 2,000 Pcs/Reel
10. Operating Temperature Range : -40~+85°C
11. Storage Temperature Range : -30~+80°C
12. Reflow soldering : According Reflow Profile
Max. 2 Times

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-268-5			
ISSUED	CONFIRMED	 ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司		PART NO.			
John	Elvis			STS-066-A			
2015.11.16	2015.11.16						