





P.C.B TERMINAL POSITION



CIRCUIT ARRANGEMENT



REFLOW SOLDERING CONDITIONS

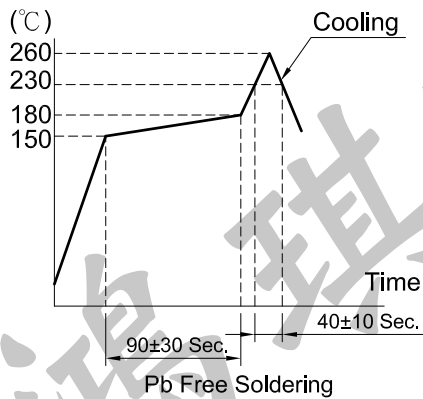

SPECIFICATIONS

- |                          |                        |
|--------------------------|------------------------|
| 1. Rating                | : DC 15V 20mA          |
| 2. Contact Resistance    | : 100mΩ Max.           |
| 3. Insulation Resistance | : 50MΩ Min. at DC 100V |
| 4. Dielectric Strength   | : AC 100V for 1 Minute |
| 5. Operating Force       | : 160±50gf             |
| 6. Circuit               | : SPST                 |
| 7. Stroke                | : 0.2±0.1mm            |
| 8. Life                  | : 200,000 Cycles       |
| 9. Taping                | : 10,000 Pcs/Reel      |

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-141-2	
ISSUED		CONFIRMED		<b>HCH</b> HORNG CHIH ISO9001 Certified 鴻琪股份有限公司 ISO14001 Certified		PART NO.	
<i>John</i> 2006.05.30		<i>Joey</i> 2006.05.30				<b>STS-07-A</b>	