





P.C.B TERMINAL POSITION



CIRCUIT ARRANGEMENT



REFLOW SOLDERING CONDITIONS

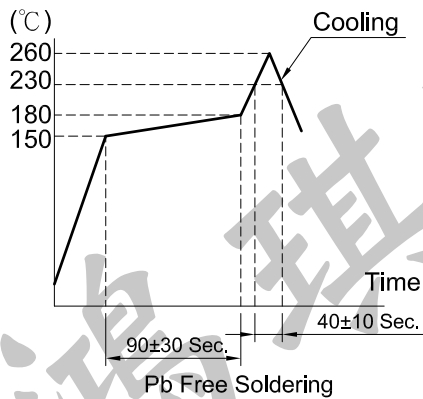

SPECIFICATIONS

- | | |
|--------------------------|------------------------|
| 1. Rating | : DC 15V 20mA |
| 2. Contact Resistance | : 100mΩ Max. |
| 3. Insulation Resistance | : 50MΩ Min. at DC 100V |
| 4. Dielectric Strength | : AC 100V for 1 Minute |
| 5. Operating Force | : 240±50gf |
| 6. Circuit | : SPST |
| 7. Stroke | : 0.2±0.1mm |
| 8. Life | : 50,000 Cycles |
| 9. Taping | : 10,000 Pcs/Reel |

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-142-2	
ISSUED		CONFIRMED		HCH HORNG CHIH ISO9001 Certified 鴻琪股份有限公司 ISO14001 Certified		PART NO.	
<i>John</i> 2006.05.30		<i>Joey</i> 2006.05.30				STS-07-B	