



5	Contact	Stainless Steel	Ag Clad	
4	Embo Film	PA9T		Black
3	Cover Film	PA9T		Clear
2	Terminal	Phosphor Bronze	Ag Plating	
1	Case	PA9T		UL94HB, Black
No.	Parts	Material	Finish	Remarks



Part No.	Operating Force	Life
STS-074	70±30gf	300,000 Cycles
STS-074-A	160±50gf	500,000 Cycles
STS-074-B	240±70gf	500,000 Cycles
STS-074-C	330±70gf	300,000 Cycles

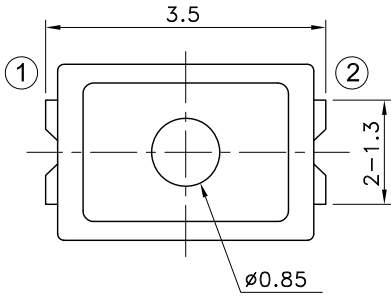

Recommend use cap shape dimension





VIEW A

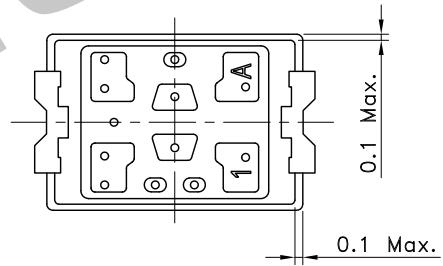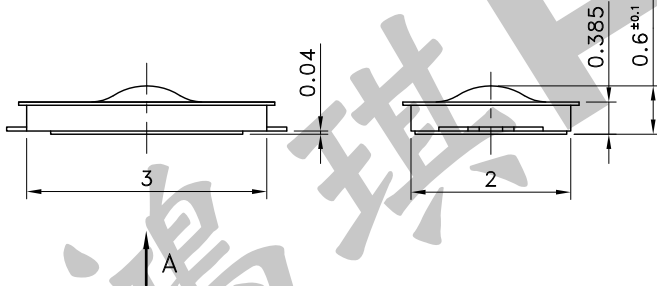


P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

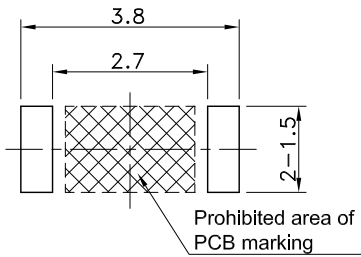

SOLDERING CONDITIONS

SPECIFICATIONS

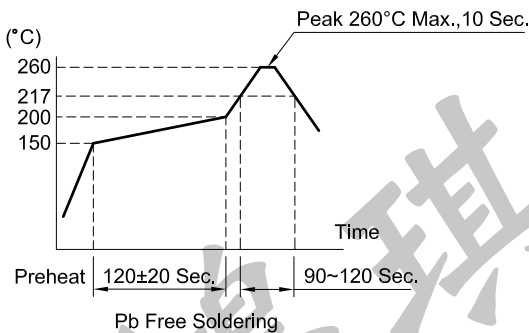

- Rating : DC 15V 20mA
- Contact Resistance : 500mΩ Max.
- Insulation Resistance : 50MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 Minute
- Stroke : 0.13±0.05mm
- Taping : 8,500 Pcs/Reel
- Operating Temperature Range : -40~+85°C
- Storage Temperature Range : -40~+85°C
- Manual soldering : Tip Temperature 350°C Max.  
Soldering Time 3 Sec. Max.

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-2029-4
ISSUED	CONFIRMED	PART NO.	
<i>John</i>	<i>Elvis</i>	<b>STS-074</b>	
2024.04.10	2024.04.10	<b>HCH</b> ISO9001 Certified ISO14001 Certified <b>HORNG CHIH</b> 鴻琪股份有限公司	