




6	Water Proof Sheet		
5	Actuator	Heat-resistant Sheet	94V-0V
4	Coating Sheet	Heat-resistant Polyimide Sheet	94V-0V
3	Adhesive Sheet	Heat-resistant Polyimide Sheet	94V-0V
2	Spring	Stainless Steel Strip	
1	Circuit Board	FR-4	94V-0V
No.	Parts	Material	Remarks

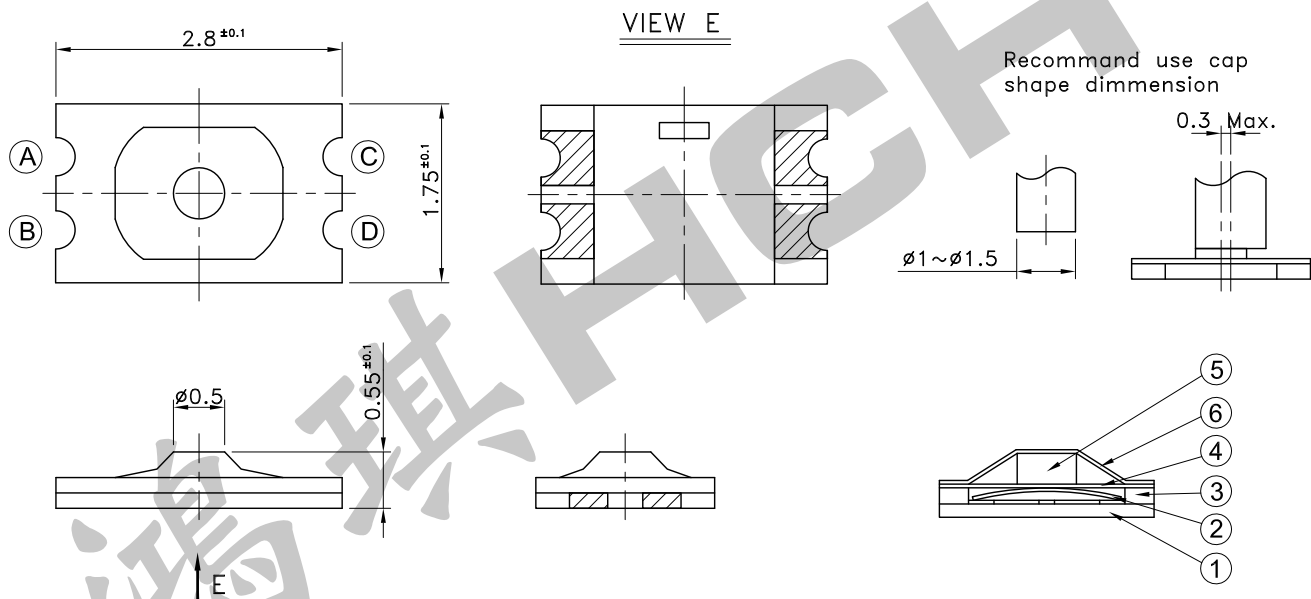


P.C.B TERMINAL POSITION



CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

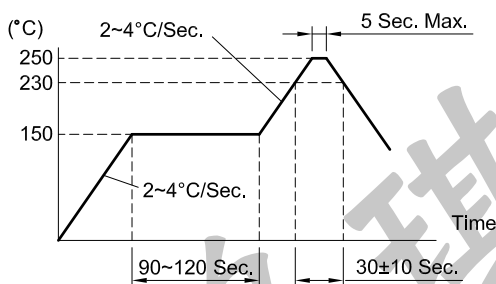

SPECIFICATIONS

- Rating : DC 12V 20mA
- Contact Resistance : 100mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 Minute
- Operating Force : 160±50gf
- Stroke : 0.12±0.07mm
- Life : 500,000 Cycles
- Taping : 5,000 Pcs/Reel
- Operating Temperature Range : -30~+80°C
- Storage Temperature Range : -40~+90°C

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-2028
ISSUED	CONFIRMED	PART NO.	
John	Elvis	STS-075	
2015.09.14	2015.09.14	HCH ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司	