

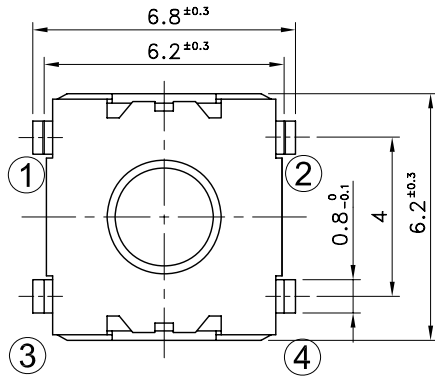




| 5 | Contact | t0.05 Stainless Steel | 1 | Ag Plating | |
|-----|----------|-----------------------|------|------------|-----------------|
| 4 | Cover | t0.1 Stainless Steel | 1 | | |
| 3 | Terminal | t0.25 Brass | 1 | Ag Plating | |
| 2 | Stem | PA6T | 1 | | UL94HB, Natural |
| 1 | Case | LCP+GF35% | 1 | | UL94V0, Black |
| No. | Parts | Material | Q'ty | Finish | Remarks |

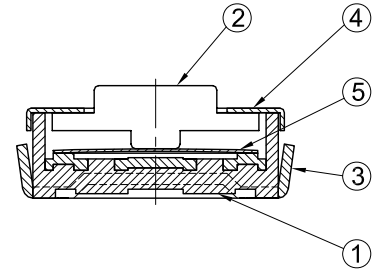


VIEW A




P.C.B TERMINAL POSITION




CIRCUIT ARRANGEMENT

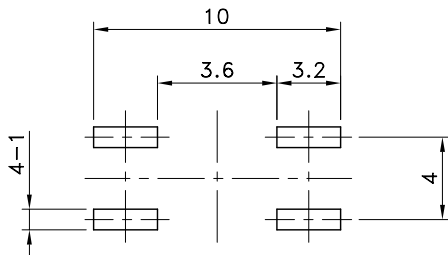

REFLOW SOLDERING CONDITIONS



SPECIFICATIONS

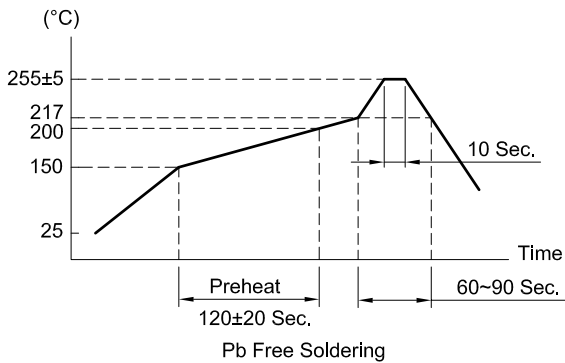

1. Rating : DC 15V 20mA
2. Contact Resistance : 100mΩ Max. at DC 5V 100mA
3. Insulation Resistance : 50MΩ Min. at DC 100V
4. Dielectric strength : AC 250V for 1 Minute
5. Operating Force : 50±15gf
6. Stroke : 0.2±0.1mm
7. Life : 2,000,000 Cycles
8. Taping package : 2,800 Pcs/Reel
9. Operation Temperature Range : -10~+40°C
10. Storage Temperature Range : -40~+70°C

| | | | | | | | |
|------------|--|-------------------------------|--|---|--|--------------------|--|
| REVISION: | | DATE: | | REVISION: | | DATE: | |
| UNIT:mm | | THIRD ANGLE PROJECTION METHOD | | TOL. UNLESS OTHERWISE STATED:±0.3 | | CODE NO.:HCH-712-2 | |
| ISSUED | | CONFIRMED | | PART NO. | | ST-077-C | |
| John | | Elvis | | HCH® HORNG CHIH 鴻琪股份有限公司 | | 2011.04.19 | |
| 2011.04.19 | | 2011.04.19 | | ISO9001 Certified ISO14001 Certified | | | |