




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

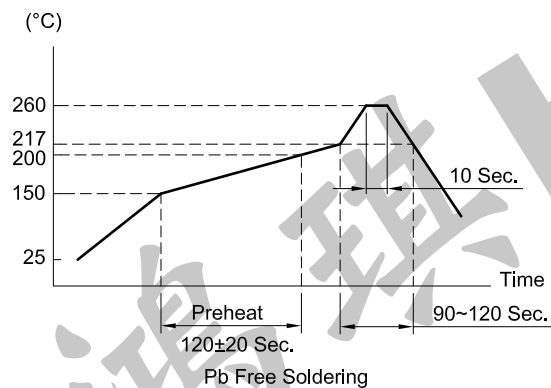

SPECIFICATIONS

- | | |
|--------------------------------|--|
| 1. Rating | : DC 12V 50mA |
| 2. Contact Resistance | : 100mΩ Max. |
| 3. Insulation Resistance | : 100MΩ Min. at DC 100V |
| 4. Dielectric Strength | : AC 250V for 1 Minute |
| 5. Operating Force | : 160±50gf |
| 6. Stroke | : 0.25 ^{+0.2} _{-0.1} mm. |
| 7. Life | : 100,000 Cycles |
| 8. Taping | : 1,200 Pcs/Reel |
| 9. Operating Temperature Range | : -20~+70°C |

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1012	
ISSUED		CONFIRMED		HORNG CHIH HCH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司		PART NO.	
<i>John</i> 2000.10.21		<i>Joey</i> 2000.10.21				STS-084	