


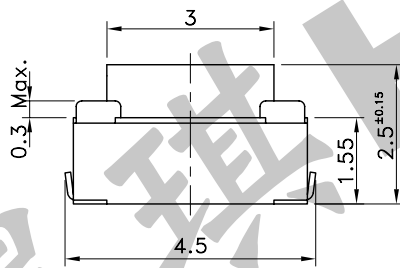
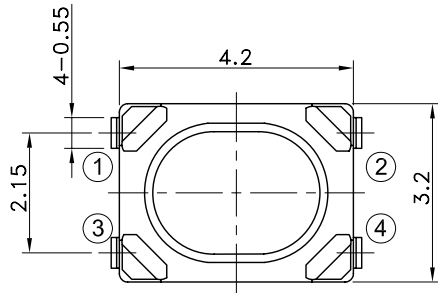


5	Contact	Stainless Steel	Ag Clad	
4	Terminal	Brass	Ag Plating	
3	Cover	Stainless Steel		
2	Stem	PPA		UL 94V0, Ivory
1	Case	LCP		UL 94V0, Nature
No.	Parts	Material	Finish	Remarks




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

SPECIFICATIONS

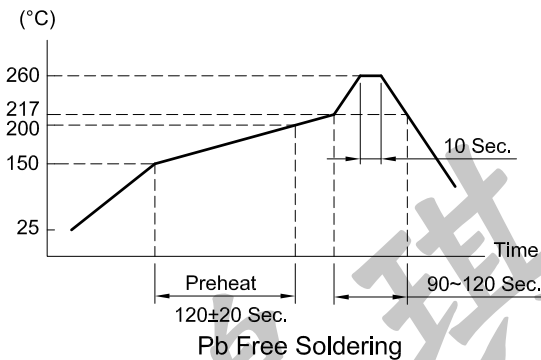

- Rating : DC 12V 50mA
- Contact Resistance : 100mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 Minute
- Operating Force : 180±50 gf
- Stroke : 0.2±0.1 mm
- Life : 100,000 Cycles
- Package : 3,000 Pcs/Reel
- Operating Temperature Range : -20~+70°C
- Storage Temperature Range : -30~+80°C
- Manual soldering : Tip Temperature 350±5°C Max.
Soldering Time 5 Sec.

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-1547-2 (N)	
ISSUED		CONFIRMED		PART NO.		STS-088-A	
 2012.08.29		 2012.08.29		 HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司			