

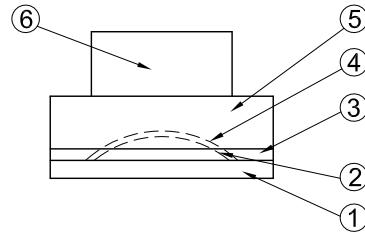

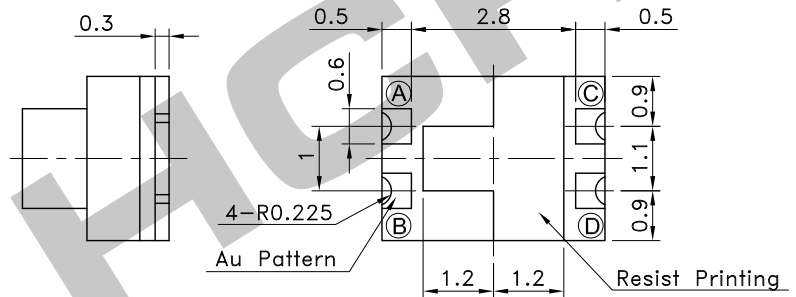



6	Plunger	Polyphthalamide	94HB
5	Case	Polyphthalamide	94HB
4	Waterproof Sheet	Heat-resistant Polyimide Sheet	94V-0
3	Adhesive Sheet	Heat-resistant Polyimide Resin	94V-0
2	Tact Spring	Stainless Strip	
1	Circuit Board	Bakelite	94V-0
No.	Parts	Material	Remarks




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

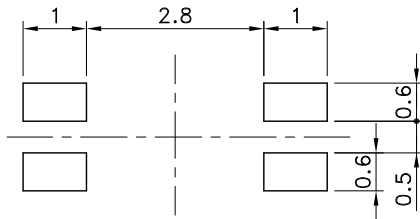

SOLDERING CONDITIONS

SPECIFICATIONS

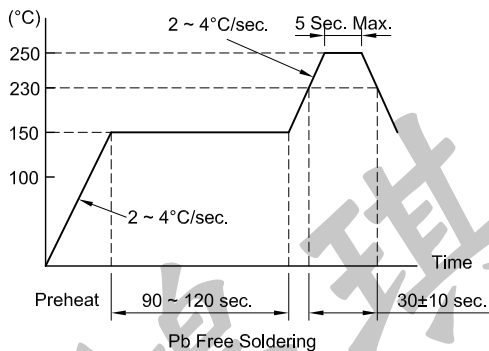

- Rating : DC 12V 20mA
- Contact Resistance : 100mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric strength : AC 250V for 1 Minute
- Force : 240±60gf
- Stroke : 0.17±0.1mm
- Life : 30,000 Cycles
- Taping package : 6,000 Pcs/Reel
- Operation Temperature Range : -30~+80°C
- Storage Temperature Range : -40~+90°C
- Manual soldering : Tip Temperature 350°C Max.
Soldering Time 3 Sec. Max.

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1433-1	
ISSUED		CONFIRMED		HCH HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司		PART NO. STS-089-B	
<i>John</i> 2009.03.11		<i>Elvis</i> 2009.03.11					