




P.C.B TERMINAL POSITION

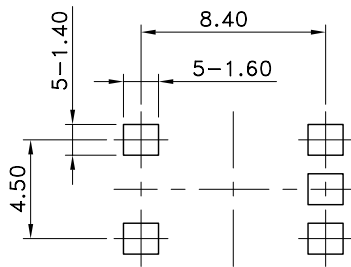

CIRCUIT ARRANGEMENT



REFLOW SOLDERING CONDITIONS

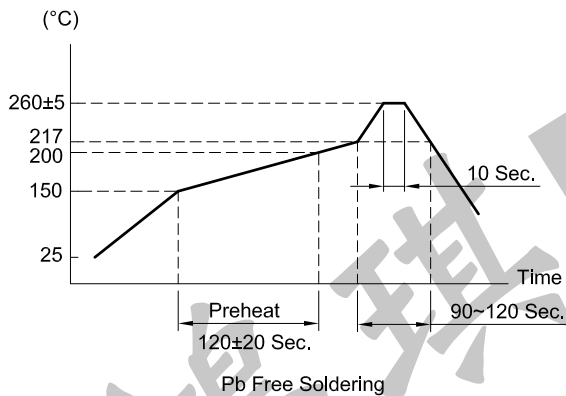

SPECIFICATIONS

- 1. Rating : DC 12V 50mA
- 2. Contact Resistance : 100mΩ Max.
- 3. Insulation Resistance : 100MΩ Min.
- 4. Dielectric strength : AC 250V for 1 Minute
- 5. Operating Force : 160±50gf
- 6. Stroke : 0.25<sup>+0.2</sup><sub>-0.1</sub>mm
- 7. Life : 1,000,000 Cycles
- 8. Taping package : 1,500 Pcs/Reel
- 9. Operation Temperature Range : -20~70°C
- 10. Reflow Soldering Profile : According Reflow Profile Max. 2 Times

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-340-2			
ISSUED	CONFIRMED	 <b>HCH</b> HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司				PART NO.	
Jonh	Elvis					STS-09	
2007.11.20	2007.11.20						