




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

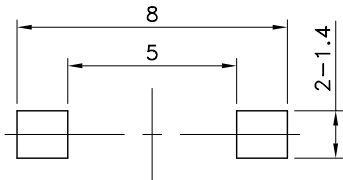

SOLDERING CONDITIONS

SPECIFICATIONS

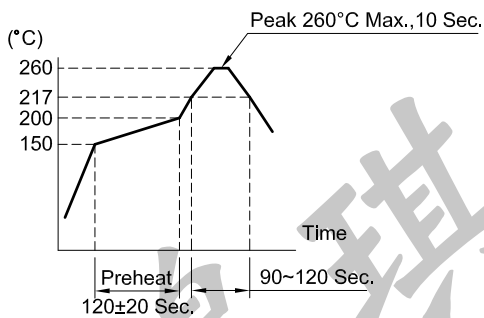

1. Rating : DC 32V 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Operating Force : 260±50gf
6. Stroke : 0.5±0.15mm
7. Life : 200,000 Cycles
8. Taping : 2,500 Pcs/Reel
9. Operating Temperature Range : -40~+85°C
10. Storage Temperature Range : -40~+85°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1130-4	
ISSUED		CONFIRMED		HCH HORNG CHIH ISO9001 Certified 鴻琪股份有限公司 ISO14001 Certified		PART NO.	
<i>John</i> 2013.02.08		<i>Elvis</i> 2013.02.08				STS-097-B	