




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

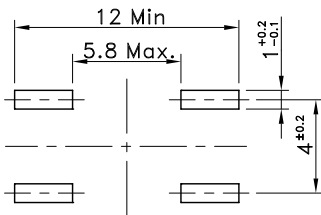

REFLOW SOLDERING CONDITIONS

SPECIFICATIONS

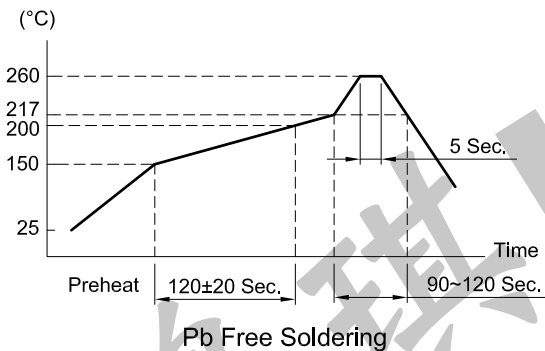

1. Rating : DC 12V 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 500V.
4. Dielectric Strength : AC 250V for 1 Minute
5. Operating Force : 160±50 gf
6. Stroke : 0.38±0.12 mm
7. Life : 500,000 Cycles
8. Package : 1,000 Pcs/Reel
9. Operating Temperature Range : -20~+80°C
10. Storage Temperature Range : -40~+85°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-2036-1 (N)			
ISSUED	CONFIRMED	 HCH HORNG CHIH <small>ISO9001 Certified ISO14001 Certified</small> 鴻琪股份有限公司		PART NO.			
John	Elvis			STS-125-A			
2015.12.28	2015.12.28						