




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

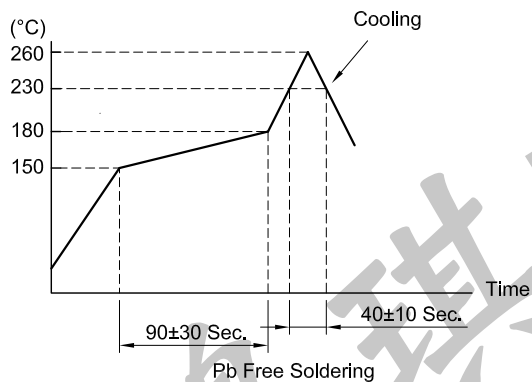

SPECIFICATIONS

1. Rating : DC 2V 10 μ A ~ DC 15V 20mA
2. Contact Resistance : 500m Ω Max.
3. Insulation Resistance : 100M Ω Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Operating Force : 350 \pm 100gf
6. Stroke : 0.75 \pm 0.15mm
7. Life : 100,000 Cycles
8. Package : 2,000 Pcs/Reel
9. Operating Temperature Range : -40~+90°C
10. Storage Temperature Range : -40~+90°C (Bulk)
-20~+60°C (Taping)
11. Reflow Soldering Profile : According Reflow Profile
Max. 2 Times

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-2089			
ISSUED	CONFIRMED	HCH ® HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司				PART NO.	
John	Elvis					STS-129	
2017.02.07	2017.02.07						