



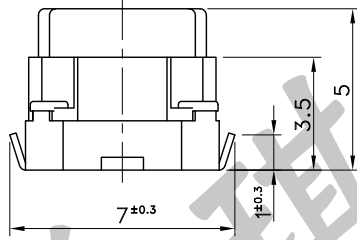



Part No.	Operating Force	Stroke	Life
STS-140-A	200±60gf	1.3±0.2mm	100,000 Cycles
STS-140-B	250±60gf	1.3±0.2mm	100,000 Cycles
STS-140-C	300±80gf	1.3±0.2mm	200,000 Cycles
STS-140-D	350±100gf	1.3±0.2mm	100,000 Cycles
STS-141-A	220±60gf	1.0±0.2mm	100,000 Cycles
STS-141-B	250±60gf	1.0±0.2mm	100,000 Cycles

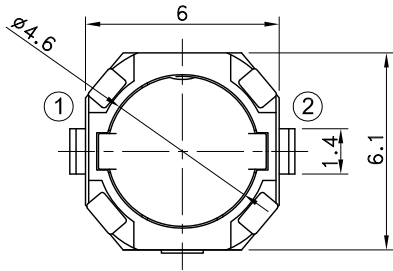


P.C.B TERMINAL POSITION



CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

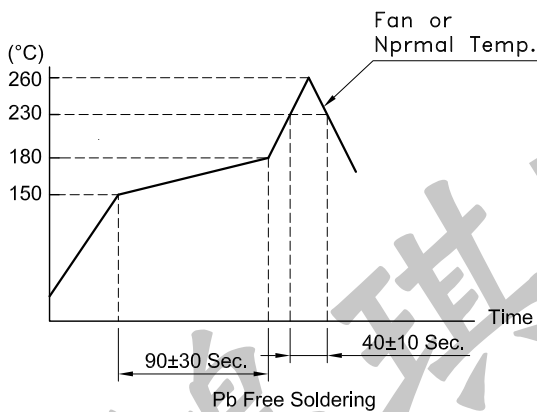

SPECIFICATIONS

1. Rating : DC 2V 10µA ~ DC 12V 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Package : 2,000 Pcs/Reel
6. Operating Temperature Range : -40~+90°C
7. Storage Temperature Range : -40~+90°C (Bulk)
-20~+60°C (Taping)

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1626-3 (P)		
ISSUED	CONFIRMED		HORNG CHIH HCH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司			PART NO.	
John	Elvis					STS-140	
2016.10.28	2016.10.28				STS-141		