
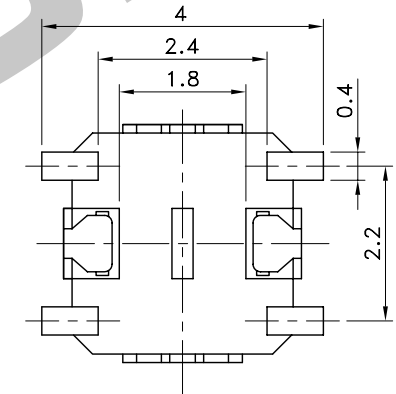

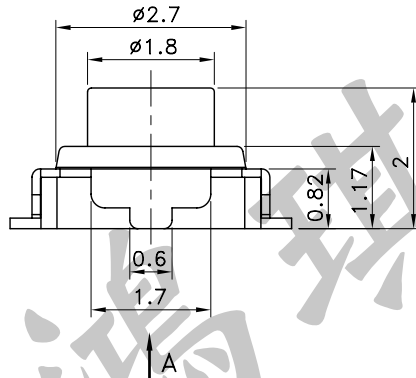




6	Tape			
5	Cover	t=0.1 SUS304		
4	Contact (ø2.5)	t=0.04 SUS301	Ag Clad	
3	Terminal	t=0.15 C2680R-EH	Ag Clad	
2	Stem	Arlen		
1	Case	Arlen		Black
No.	Parts	Material	Finish	Remarks

Part No.	Operating Force
STS-144-A	160±50gf
STS-144-B	260±50gf

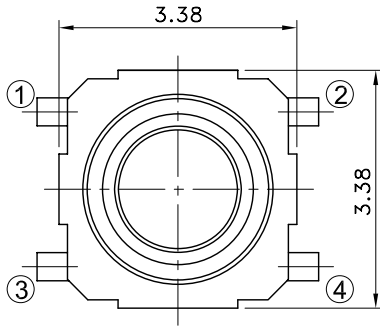


P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

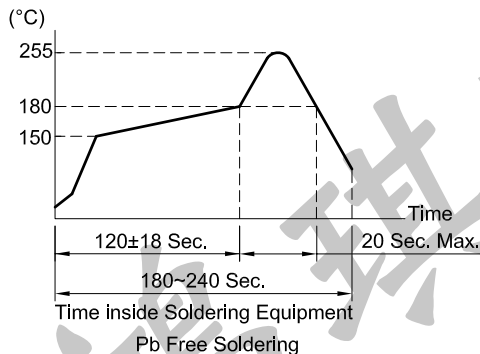

SPECIFICATIONS

1. Rating : DC 12V 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Stroke : 0.15 ± 0.1 mm
6. Life : 100,000 Cycles
7. Operating Temperature Range : -30~+80°C
8. Operating Temperature Range : -30~+80°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.1		CODE NO.:HCH-1824	
ISSUED		CONFIRMED		PART NO.		<h1>STS-144</h1>	
<i>John</i>		<i>Elvis</i>		HCH HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司			
2012.02.17		2012.02.17					