

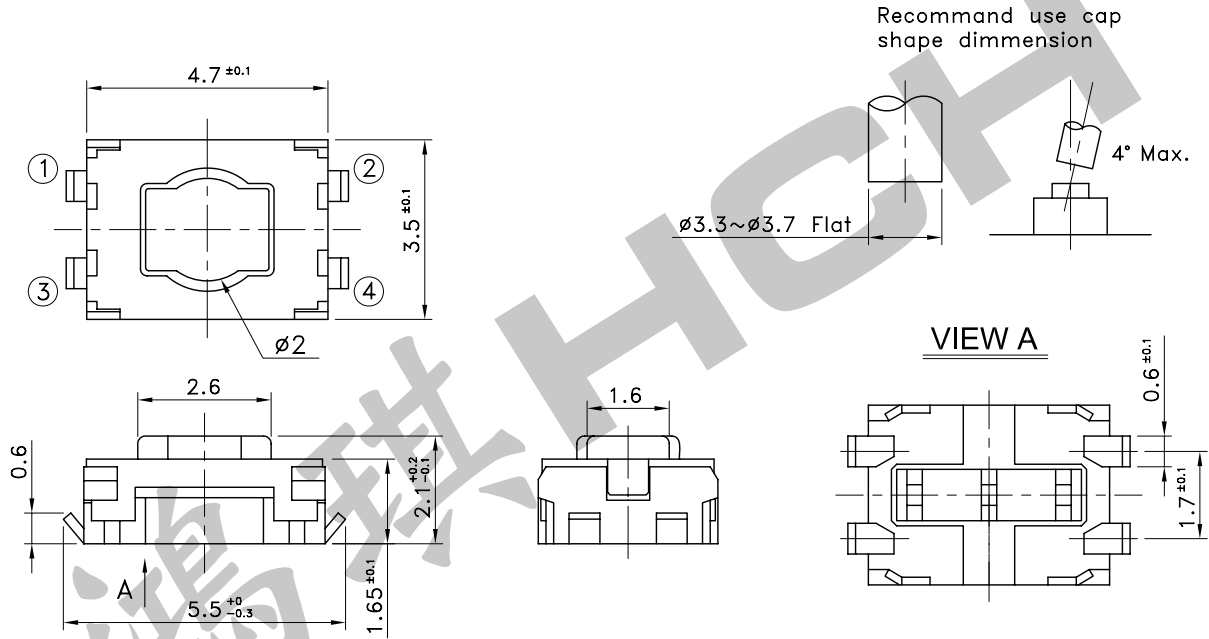


Part No.	Operating Force	Life
STS-153	100±50gf	1,000,000 Cycles
STS-153-A	160±50gf	1,000,000 Cycles
STS-153-B	240±60gf	500,000 Cycles
STS-153-C	350±100gf	200,000 Cycles
STS-153-E	500±150gf	200,000 Cycles




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

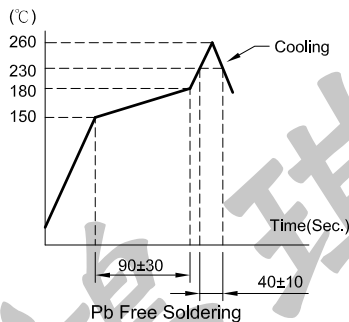

SPECIFICATIONS

- | | |
|--------------------------------|---------------------------------------------|
| 1. Rating | : DC 15V 20mA Max.
DC 2V 10µA Min. |
| 2. Contact Resistance | : 100mΩ Max. |
| 3. Insulation Resistance | : 100MΩ Min. at DC 100V |
| 4. Dielectric strength | : AC 250V for 1 Minute |
| 5. Stroke | : 0.25 ^{+0.05} _{-0.15} mm |
| 6. Taping Package | : 4,000 Pcs/Reel |
| 7. Operating Temperature Range | : -40~+85°C |
| 8. Storage Temperature Range | : -40~+85°C (Bulk)
-20~+60°C (Taping) |

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.: HCH-1845	
ISSUED		CONFIRMED		HORNG CHIH HCH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司		PART NO.	
<i>John</i>		<i>Elvis</i>				STS-153	
2012.07.05		2012.07.05					