





P.C.B TERMINAL POSITION

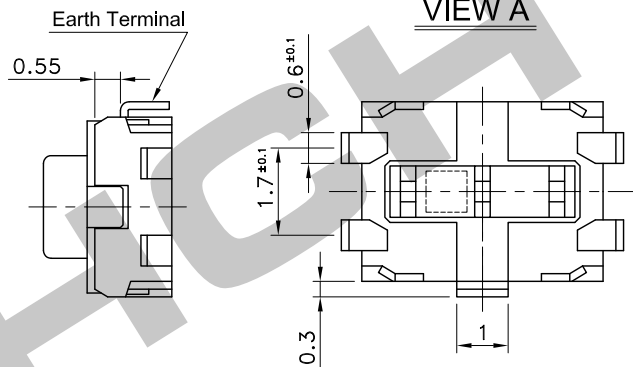

REFLOW SOLDERING CONDITIONS

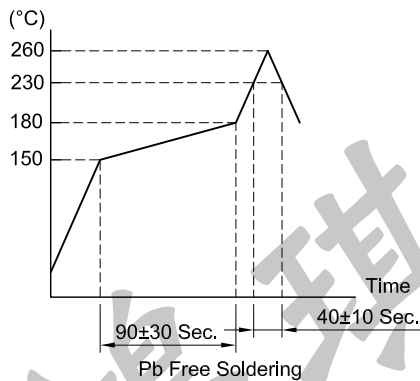

CIRCUIT ARRANGEMENT



SPECIFICATIONS

- | | |
|--------------------------------|---------------------------------------|
| 1. Rating | : DC 15V 20mA Max.
DC 2V 10μA Min. |
| 2. Contact Resistance | : 100mΩ Max. |
| 3. Insulation Resistance | : 100MΩ Min. |
| 4. Dielectric strength | : AC 250V for 1 Minute |
| 5. Operating Force | : 250±60gf |
| 6. Stroke | : 0.7±0.15mm |
| 7. Life | : 1,000,000 Cycles |
| 8. Taping Package | : 4,000 Pcs/Reel |
| 9. Operating Temperature Range | : -40~+85°C |

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-352-1	
ISSUED		CONFIRMED		HCH HORNG CHIH ISO9001 Certified 鴻琪股份有限公司 ISO14001 Certified		PART NO. STS-156	
John		Elvis					
2012.04.24		2012.04.24					