




Recommend use cap shape dimension




P.C.B TERMINAL POSITION



SOLDERING CONDITIONS

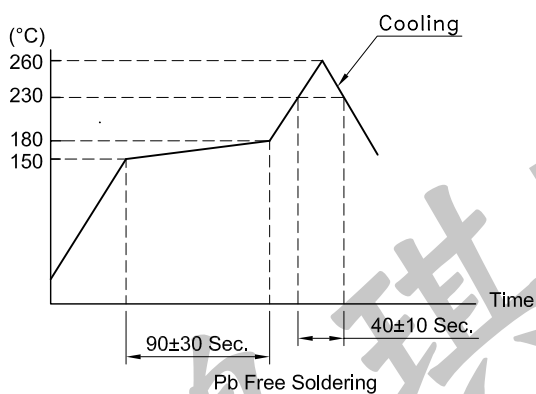

CIRCUIT ARRANGEMENT



SPECIFICATIONS

1. Rating : DC 15V 20mA Max.
DC 2V 10µA Min.
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Operating Force : 250±60gf
6. Stroke : 0.7±0.15mm
7. Life : 1,000,000 Cycles
8. Taping : 4,000 Pcs/Reel
9. Operating Temperature Range : -40~+85°C
10. Storage Temperature Range : -40~+85°C (Bulk)
: -20~+60°C (Taping)
11. Reflow soldering : According Reflow Profile
Max. 2 Times
12. Manual soldering : Tip Temperature 350°C Max.
Soldering Time 3 Sec. Max.

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-1482	
ISSUED		CONFIRMED		HORNG CHIH HCH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司		PART NO.	
John		Elvis				STS-157	
2012.04.24		2012.04.24					