




P.C.B TERMINAL POSITION

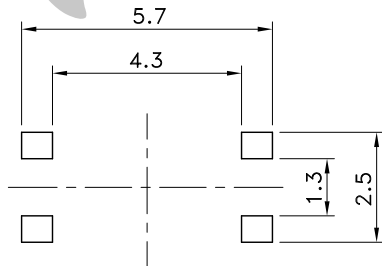

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

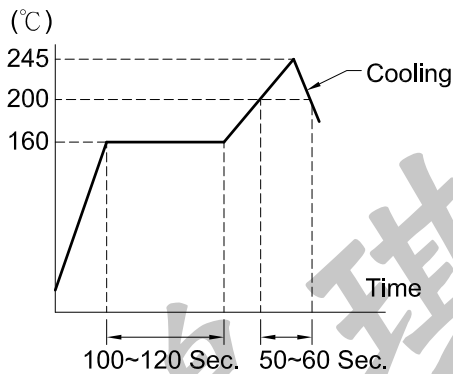

SPECIFICATIONS

- 1. Rating : DC2V 10 $\mu$ A~DC15V 20mA
- 2. Contact Resistance : 500m $\Omega$  Max.
- 3. Insulation Resistance : 50M $\Omega$  Min. at DC 100V
- 4. Dielectric Strength : AC 250V For 1 Minute
- 5. Operating Force : 250 $\pm$ 60 gf
- 6. Stroke : 0.23 mm
- 7. Life : 1,000,000 Cycles
- 8. Package : 10,000 Pcs/Reel
- 9. Operating Temperature Range : -40~+85 $^{\circ}$ C
- 10. Storage Temperature Range : -40~+85 $^{\circ}$ C (Bulk)  
: -20~+60 $^{\circ}$ C (Taping)

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED: $\pm$ 0.1		CODE NO.:HCH-2390			
ISSUED	CONFIRMED	<b>HCH</b> <sup>®</sup> HORNG CHIH ISO9001 Certified 鴻琪股份有限公司 ISO14001 Certified				PART NO.	
John	Elvis					STS-158	
2021.03.03	2021.03.03						