




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

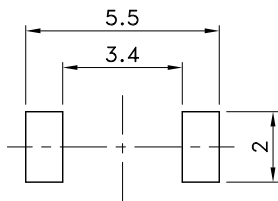

SOLDERING CONDITIONS

SPECIFICATIONS

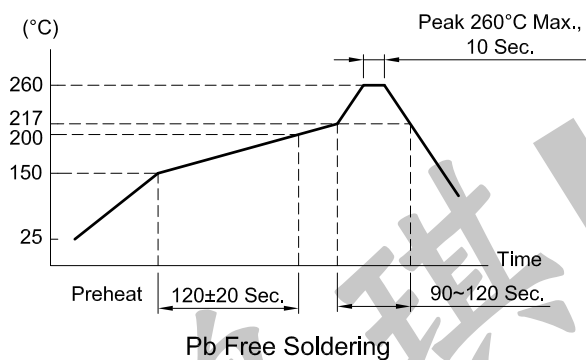

1. Rating : DC 12V 50mA
2. Contact Resistance : 100mΩ Max. at DC 5V 10mA
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Operating Force : 140±50 gf
6. Stroke : 0.12^{+0.08}_{-0.05} mm
7. Life : 100,000 Cycles
8. Package : 3,000 Pcs/Reel
9. Operating Temperature Range : -20~+70°C
10. Storage Temperature Range : -30~+80°C
11. Manual soldering : Tip Temperature 350±5°C
Soldering Time 5 Sec.

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-2297-1			
ISSUED	CONFIRMED	HORNG CHIH 鴻琪股份有限公司 <small>ISO9001 Certified ISO14001 Certified</small>				PART NO.	
<i>John</i>	<i>Elvis</i>					STS-200	
2022.11.03	2022.11.03						