




P.C.B TERMINAL POSITION



CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

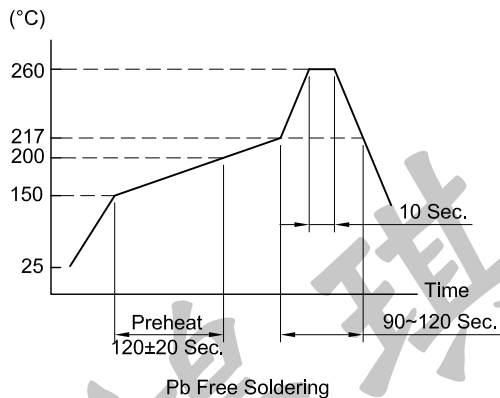

SPECIFICATIONS

- 1. Rating : DC 12V 50mA
- 2. Contact Resistance : 100mΩ Max.
- 3. Insulation Resistance : 100MΩ Min. at DC 100V
- 4. Dielectric strength : AC 250V for 1 Minute
- 5. Operating Force : 250±80 gf
- 6. Stroke : 0.4±0.2 mm
- 7. Life : 300,000 Cycles
- 8. Package : 800 Pcs/Reel
- 9. Operating Temperature Range : -40~+85°C
- 10. Storage Temperature Range : -40~+85°C
- 11. Manual soldering : Tip Temperature 350°C Max.
Soldering Time 3 Sec. Max.
- 12. Water Proof : IP67

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.: HCH-2469	
ISSUED		CONFIRMED		HCH [®] ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司		PART NO. STS-218	
<i>John</i> 2022.01.24		<i>Elvis</i> 2022.01.24					