


SMD TACTILE SWITCHES


GOLD PLATING

STS-A5G	H=4.3mm	1,200Pcs/Reel
STS-B5G	H=5.0mm	1,200Pcs/Reel
STS-C5G	H=6.0mm	800Pcs/Reel
STS-D5G	H=7.0mm	750Pcs/Reel
STS-E5G	H=9.5mm	500Pcs/Reel

- Rating: DC12V 50mA
- Stroke: 0.25mm
- Force: 160±50gf
- Life: 1,000,000 Cycles

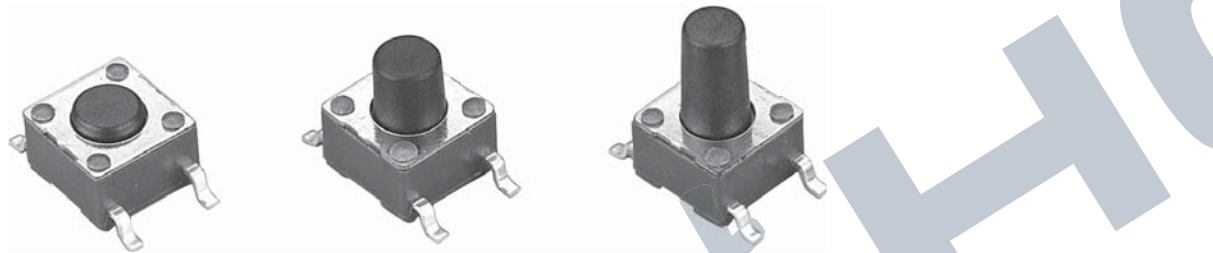

Circuit



Pad Layout

