PUSH SWITCHES

PTS-01 (6.2X6.2mm)

- Rating: DC30V 50mA
- Stroke: 0.5mm
- Force: PTS-01-A: 75gf
  PTS-01-B: 130gf
- Life: PTS-01-A: 5,000,000 Cycles
  PTS-01-B: 1,000,000 Cycles

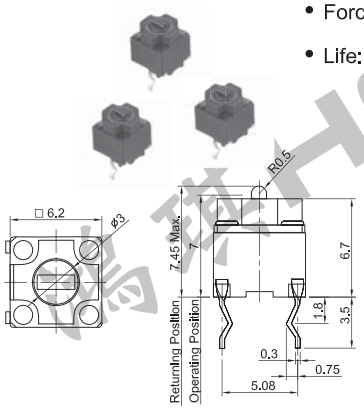

Circuit

Mounting Hole Layout



WITH LED TYPE
PTS-012 (6X6mm)

- Rating: DC12V 50mA
- Stroke: 0.25mm
- Force: 160±50gf
- Life: 100,000 Cycles

PTS-012-L2	Red
PTS-012-L5	Green
PTS-012-L8	Yellow

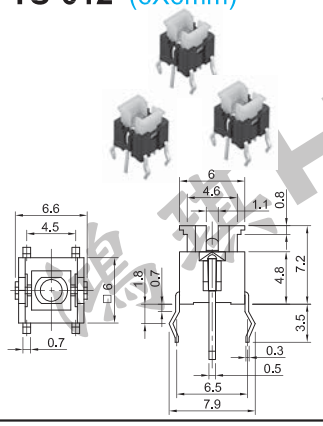

Circuit



Mounting Hole Layout



PUSH TO LOCK
PTS-018S (5.8X5.8mm)

- Rating: DC30V 100mA
- Stroke: Full 1.8 Lock 1mm
- Force: 150±50gf
- Life: 10,000 Cycles

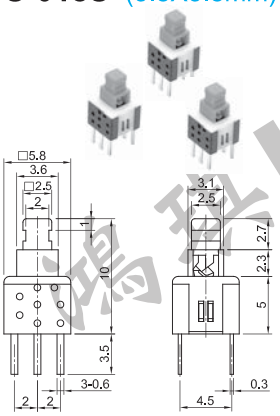

Circuit



Mounting Hole Layout



PTS-019 (7X7mm)

- Rating: DC30V 100mA
- Stroke: Full 1.8 Lock 1mm
- Force: 140±50gf
- Life: 10,000 Cycles

PUSH TO LOCK: PTS-019S
PUSH NO LOCK: PTS-019N

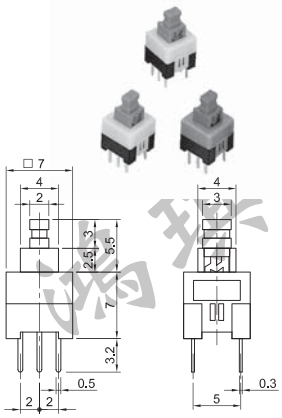

Circuit



Mounting Hole Layout



PTS-020 (8X8mm)

- Rating: DC30V 100mA
- Stroke: Full 2.5 Lock 1.5mm
- Force: 180±50gf
- Life: 10,000 Cycles

PUSH TO LOCK: PTS-020SA
PUSH NO LOCK: PTS-020NCA
WITH CLICK

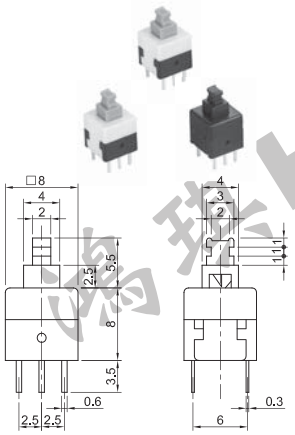

Circuit



Mounting Hole Layout



PTS-028 (8.5X8.5mm)

- Rating: DC30V 100mA
- Stroke: Full 2.5 Lock 1.5mm
- Force: 220±50gf
- Life: 10,000 Cycles

PUSH TO LOCK: PTS-028S
PUSH NO LOCK: PTS-028N
PUSH NO LOCK: PTS-028NC
WITH CLICK

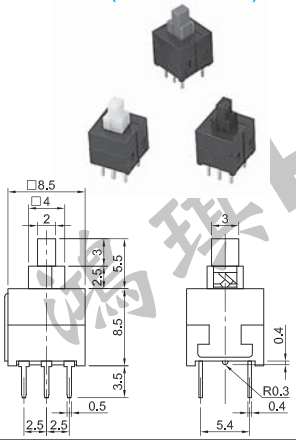

Circuit



Mounting Hole Layout



PTS-051 (10X10mm)

- Rating: DC30V 100mA
- Stroke: Full 2.5 Lock 1.5mm
- Force: 200±50gf
- Life: 10,000 Cycles

PUSH TO LOCK: PTS-051S
PUSH NO LOCK: PTS-051N

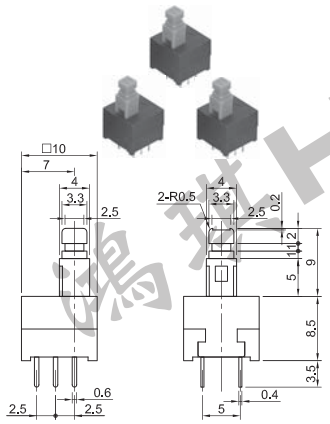

Circuit



Mounting Hole Layout



PUSH TO LOCK
PTS-063S

- Rating: DC30V 100mA
- Stroke: Full 2.5 Lock 1.5mm
- Force: 350±100gf
- Life: 10,000 Cycles

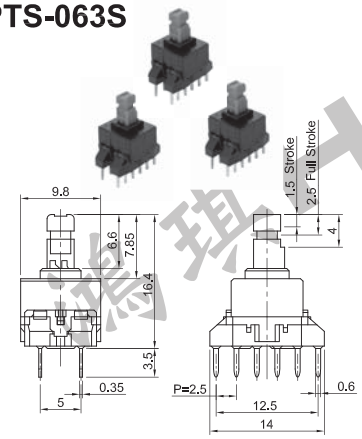

Circuit



Mounting Hole Layout



鴻瑛HCH