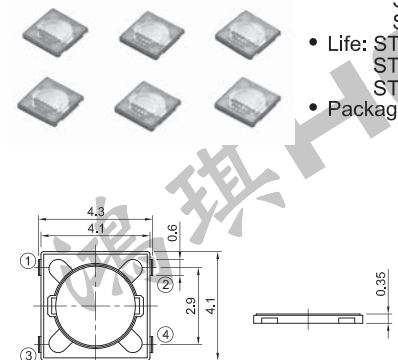


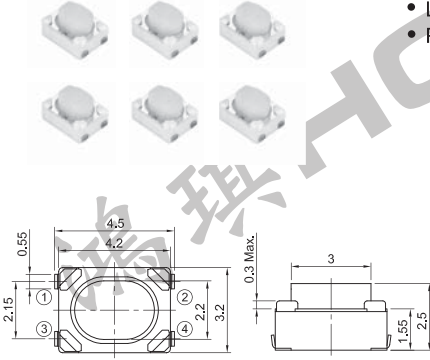


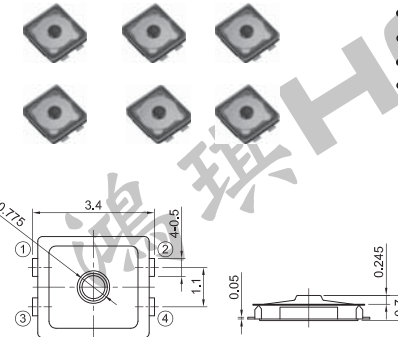


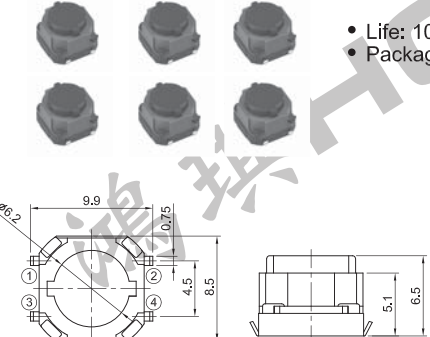


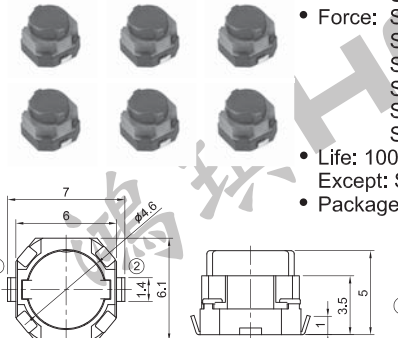


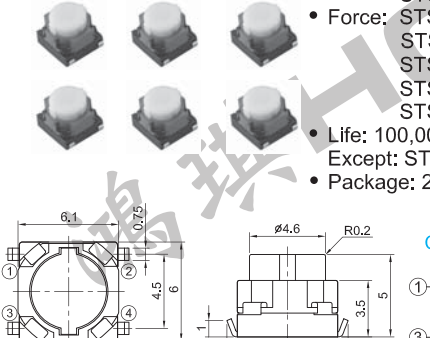


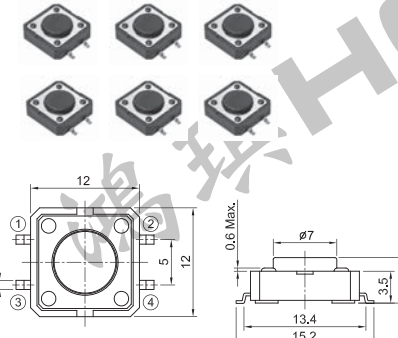


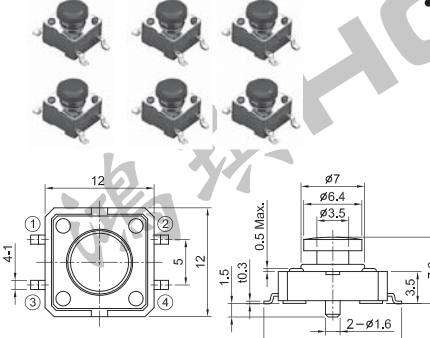



SMD TACTILE SWITCHES

<p>STS-070 H=0.35mm</p> <ul style="list-style-type: none"> Rating: DC2V 10μA~DC15V 20mA Stroke: 0.2mm Force: STS-070-A: 160\pm50gf STS-070-B: 240\pm60gf STS-070-C: 350\pm100gf Life: STS-070-A: 1,000,000 Cycles STS-070-B: 500,000 Cycles STS-070-C: 200,000 Cycles Package: 10,000 Pcs/Reel  <p>Circuit</p>  <p>Pad Layout</p> 	<p>STS-088-A H=2.5mm</p> <ul style="list-style-type: none"> Rating: DC12V 50mA Stroke: 0.2mm Force: 180\pm50gf Life: 100,000 Cycles Package: 3,000 Pcs/Reel  <p>Circuit</p>  <p>Pad Layout</p> 
<p>DOUBLE ACTION TYPE STS-115 H=0.7mm</p> <ul style="list-style-type: none"> Rating: DC2V 10μA ~ DC15V 20mA Stroke 1: 0.07mm Stroke 2: 0.16mm Force 1: 70\pm40gf Force 2: 200\pm60gf Life: 100,000 Cycles Package: 8,000 Pcs/Reel  <p>Circuit</p>  <p>Pad Layout</p> 	<p>STS-116-D1 H=6.5mm STS-116-E1</p> <ul style="list-style-type: none"> Rating: DC2V 10μA ~ DC12V 50mA Stroke: 1.0mm Force: STS-116-D1: 400\pm80gf STS-116-E1: 500\pm150gf Life: 100,000 Cycles Package: 1,000 Pcs/Reel  <p>Circuit</p>  <p>Pad Layout</p> 
<p>STS-140 H=5.0mm STS-141</p> <ul style="list-style-type: none"> Rating: DC2V 10μA ~ DC12V 50mA Stroke: STS-140: 1.3mm STS-141: 1.0mm Force: STS-140-A: 200\pm60gf STS-140-B: 250\pm60gf STS-140-C: 300\pm80gf STS-140-D: 350\pm100gf STS-141-A: 220\pm60gf STS-141-B: 250\pm60gf Life: 100,000 Cycles Except: STS-140-C: 200,000 Cycles Package: 2,000 Pcs/Reel  <p>Circuit</p>  <p>Pad Layout</p> 	<p>STS-142 H=5.0mm STS-143</p> <ul style="list-style-type: none"> Rating: DC2V 10μA ~ DC12V 50mA Stroke: STS-142: 1.0mm STS-143: 1.3mm Force: STS-142-A: 220\pm60gf STS-142-B: 250\pm60gf STS-143-A: 200\pm60gf STS-143-B: 250\pm60gf STS-143-C: 350\pm100gf Life: 100,000 Cycles Except: STS-143-C: 30,000 Cycles Package: 2,000 Pcs/Reel  <p>Circuit</p>  <p>Pad Layout</p> 
<p>STS-216-A H=4.3mm STS-216-B H=5.0mm</p> <ul style="list-style-type: none"> Rating: DC12V 50mA Stroke: 0.3mm Force: STS-216-A: 160\pm50gf STS-216-B: 260\pm50gf Life: 100,000 Cycles Package: 800 Pcs/Reel  <p>Circuit</p>  <p>Pad Layout</p> 	<p>WITH TAB STS-217 H=7.3mm</p> <ul style="list-style-type: none"> Rating: DC12V 50mA Stroke: 0.3mm Force: 260\pm50gf Life: 1,000,000 Cycles Package: 500 Pcs/Reel  <p>Circuit</p>  <p>Pad Layout</p> 